

GAM-60 錫膏攪拌機

HIGH-SPEED CREAM SOLDER MIXER

標準製程必須配備



GAM-60

- ▲ 適於ISO-9000錫膏攪拌條件。
Excellent for ISO 9000 Solder Paster Mix Process Condition. Strong Mixing / Kneading Power. Enables Preparation Uniform / High-Quality Solder Paste. Increasing Printing Quality.
- ▲ LED面板顯示及微電腦控制，易於操作。
LED Display Panel and Microprocessor Control. Easy to Operate.
- ▲ 擁有操作時間記憶功能。
Operation Time Memory Capability.
- ▲ 不與空氣接觸條件下，準確完成錫膏攪拌。
Mixing / Kneading Solder Paste without Contact Exterior Atmosphere.
- ▲ 萬用治具，適用任何廠牌錫膏包裝。
Universal Fixture, Suitable for All Kind of Commercial Container.



AVI PRECISION ENGINEERING PTE LTD



特點

FEATURE:

■操作簡易 Easy to Operation.

GAM-60錫膏攪拌機的操作是非常單純容易。

將裝有錫膏器置於萬用治具上，設定好攪拌時間後，按啟動鍵即可，攪拌完成，機器會自動停止。

The operation of GAM-60 solder paste mixer is very simple.

Loading the original solder paste container into universal holder then press "Start" button. The GAM-60 will mix the solder paste, after your setting time the machine will stop automatically. The well mixed solder paste is ready for printing.

Setting the timer by press the increasing and decreasing button. The LED display the setting time.

■良好的攪拌能力 WELL MIXING CAPACITY:

GAM-60錫膏攪拌機提供非常強的攪拌能力。

任何人都能夠準備均勻的錫膏攪拌，使SMT印刷製程簡單化。

The GAM-60 solder paste mixer provide powerful solder paste mixing capacity. Anyone can preparation the well mixed solder paste to simply the printing process in SMT line.

■適用性強 FLEXIBILITY:

GAM-60錫膏攪拌機備有萬用治具功能。

適用任何廠牌的錫膏容器。

The GAM-60 solder paste mixer equipped with universal solder paste container holders. Which can hold most of commercial solder paste container. The holders are very easy to load and unload the solder past container.

■準確的操作時間控制 PRECISE OPERATION TIME CONTROL:

GAM-60採用電子式計算器及LED顯示。操作時間設定簡易

(0.1~9.9分鐘)。攪拌時間終了，以蜂鳴器聲告知。

The GAM-60 equipped with electronic timer and LED display. It is very easy to operate and the setting rang from 6 seconds to 9.9 minutes by 6 seconds index.

■低保養 LOW MAINTENANCE:

密封式軸承，不需經常潤滑及保養。

The GAM-60 solder paste mixer provided lubrication and maintenance free operation.



啟動鍵 On/Off SW.

時間設定/顯示 Time set & display

電源開關鍵 Power switch

隱藏鎖 Interlock

■上視圖 Top view

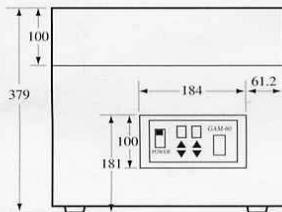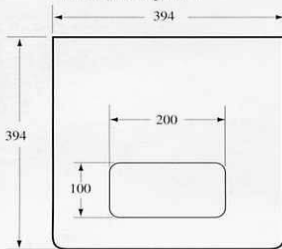

■正視圖 Front view (mm)


規格表 SPECIFICATION

運轉速度 Arm Rotation Speed Approx	400RPM/分鐘MIN (WHEN LOADED)
工作能力 Solder Container	500g/1000g同時放2瓶 Up two container can be loaded.
工作電壓 Power Supply	AC 110V/220V 60Hz/50Hz
外觀 Construction	粉體烤漆 Painted with epoxy base paint.
微電腦處理能力 Micro processor Capability	斷電記憶功能 Record former data by memory. Revise data for save real time.
顯示與警告 Display & Alarm	LED數字顯示，燈光閃爍與警響警告 LED Digital Display.Flash light with audio alarm.
攪拌時間 Kneading timer	0.1~9.9Min.分鐘
操作方式 Operational	觸摸按鍵，簡易操作 Touch panel, easy operation.
夾具功能 Holding	萬用治具 Suitable different kind solder past container.
噪音 Noise	低操作聲音 Low operation noise.
機台尺寸 External	390x390x385mm (LxWxH)
機台重量 Weight Approx	30kgs

■選購品 OPTIONS

配重器 Blance
50g,100g,200g

代理商：

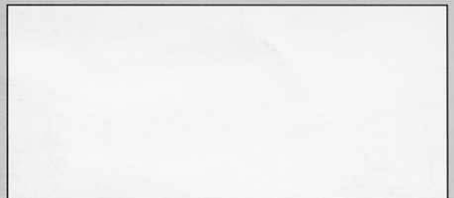

AVI PRECISION ENGINEERING PTE LTD